


PCI TS Record Card

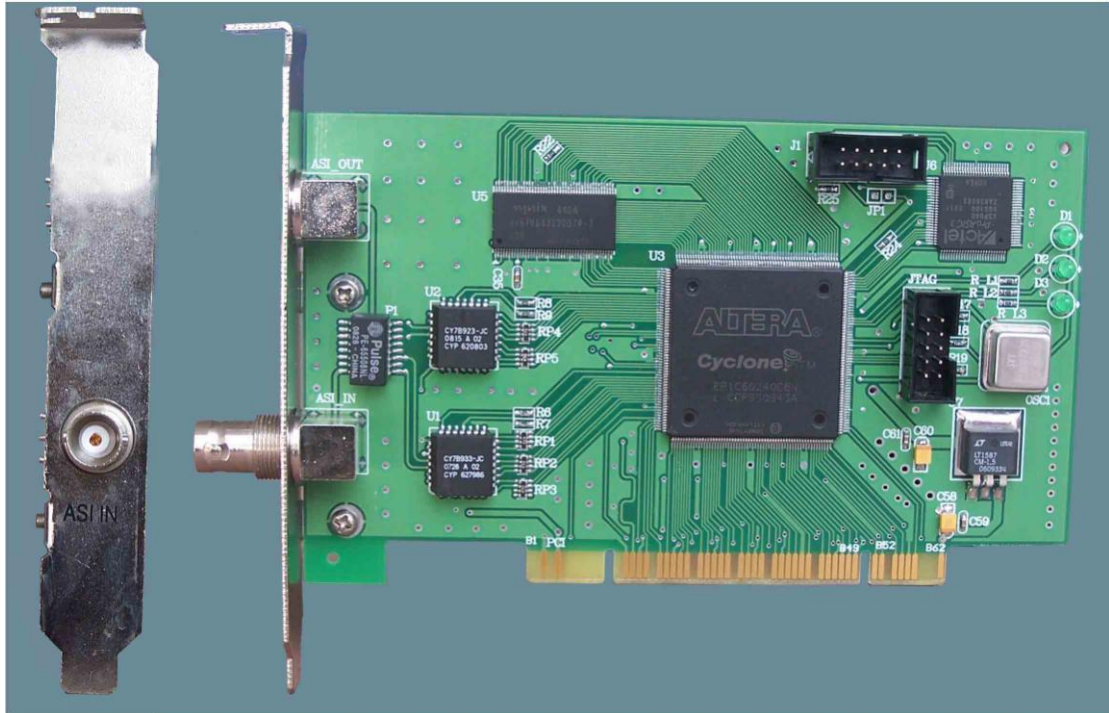

Overview

This PCI recoding card meets MPEG-II/DVB standard and provides a complete API interface, which make is an ideal hardware development platform for digital TV equipment. It is mainly used for sending transporting stream date stored in computer hardware in specific code rate, and it can be used as digital TV stream generator.

Features

- ◆ Record code rate, convenient and practical
- ◆ Automatic calculation from the stream rate, and also can manually set play code rate
- ◆ Onboard 8M bytes of super high-speed buffer memory to ensure the stability of high bit-rate output
- ◆ Support secondary development

Technical Specification

PCI		3/5V Voltage compatible standard
ASI		1×ASI (input)
General Features	Temperature Range	0~45°C (Operation); -20~80°C (Storage)
	Power	100-240VAC, 50Hz, 25W